

SPECIFICATIONS

Brumby Range 5G

COLOURS	701 Cashmere, 702 Natural Oak, 703 Nimbus, 704 Shark, 707 Blackbutt, 708 NSW Spotted Gum
THICKNESS	7mm
DIMENSION	1524mm (L) x 228mm (W)
CLICK	5G-I
CORE	SPC

Brumby Range LUX

COLOURS	501 Cashmere, 502 Natural Oak, 503 Nimbus, 504 Shark, 506 Ironbark, 507 Blackbutt, 508 NSW Spotted Gum
THICKNESS	5.5mm
DIMENSION	1220mm (L) x178mm (W)
CLICK	2G
CORE:	SPC

PERFORMANCE

CLASSIFICATION: EN 13329

- » Residential 23 (Heavy Traffic)
- » Commercial 33 (Heavy Traffic)

ABRASION RESISTANCE: AC4

ACOUSTIC – IMPACT SOUND ISOLATION: ASTM E989-12

- » Impact Isolation Class Ln 57db (tested on 150mm bare concrete)

FIRE CLASSIFICATION: ISO 9239-1-2003

- » Critical Radiant Flux 10.7kw/m²
- » Smoke value 72% minimum

SLIP RESISTANCE: AS 4586-2013

- » Wet Pendulum Slider 96 P2

CRYSTALLINE SILICA Below detection limit 0.15%

WARRANTIES

Brumby Range Residential Warranties are provided to the original purchaser for:

- » Lifetime wear resistance
- » Lifetime waterproofing
- » Lifetime structural performance.

General warranty terms and conditions apply, for more details visit www.auswood.com.au

FINISH	UV
GLOSS	6-10%
BACKING	1.5mm EVA
EDGE	Micro-bevel
PACK SIZE	6 boards, 2.085m²
PALLET SIZE	116.75 m² per pallet or 56 cartons

FINISH	UV
GLOSS	6-10%
BACKING	1.5mm EVA
EDGE	Micro-bevel
PACK SIZE	10 boards, 2.17 m2 per carton
PALLET SIZE	141.154 m² per pallet or 65 cartons



506
IRONBARK



CONTACT
Australian Wood Company Pty Ltd
Unit 6, 4-20 Violet St, Revesby NSW 2212
P 02 9792 8986 E info@auswood.com.au
www.auswood.com.au

Brumby Range Hybrid Flooring



EXCELLENCE IN
PERFORMANCE &
APPEARANCE

708
NSW SPOTTED GUM




NEW **BRUMBY RANGE** HYBRID FLOORING COMBINES THE WATERPROOF PROPERTIES OF VINYL, THE DURABILITY OF LAMINATE AND THE LOOK OF TIMBER, TO DELIVER A COMPLETE, ALL-PURPOSE FLOORING SOLUTION.



Brumby Range LUX

An economical, hybrid flooring bringing the benefits and beauty of hybrid flooring to every type of interior space.

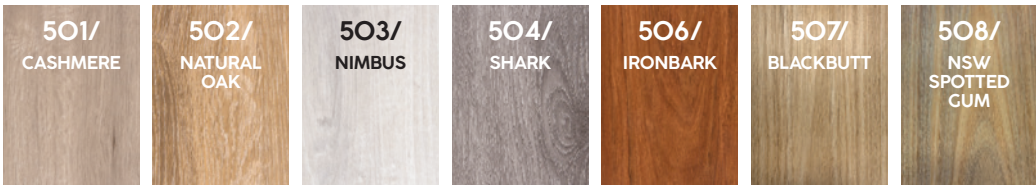

Brumby Range 5C

A premium hybrid flooring – with a stronger, integrated 'push down' locking system, which allows faster, easier installation.

