



AUSWOOD INTERNATIONAL PTY LTD

Unit 6, 4-14 Violet St, REVESBY, NSW 2212


Ph 02 9792 8986 Fax 02 8607 8228



Specifications

Timber Species	Paulownia	Straightness	max 0.5mm
Density	260 kg/m ³	Moisture Content	8-10%
Size	1210x128mm +/-1mm	Coating	Water-borne Acrylic
Thickness	5mm +/-0.5mm		

Colours

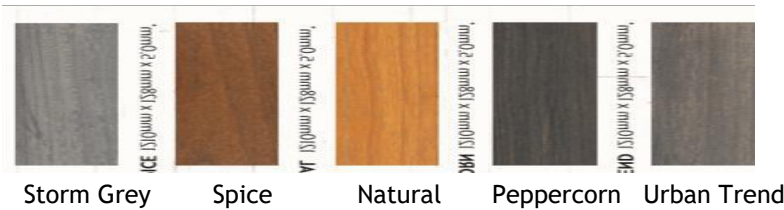

Tape Acrylic adhesive double coated 0.8mm polyethylene foam

Tape Bonding

Time 20 minutes 50%; 60 minutes 75%;
24 hours 90%; 72 hours 100%

Initial temperature 15°C-35°C, not below 10°C

Pressure Firm pressure min 15PSI

Packing 1.5488m² or 10 pieces per carton with max 20% short boards
198.246m² or 128 carton per pallet

Fire Rating Group 3 CSIRO Report No FNK12125
average specific extinction area 61.6 m²/kg

Temperature Wall surface temperature not to exceed 50 deg Celcius

VoC Intertek Report No 181022005SHF-001

Table 1 Evaluation for different scenarios

Modeling scenario	Verdict(Pass/Fail)
Standard school classroom (SC)	Pass
Private office (PO)	Pass
Single family residence (R)*	Pass

